

EXAMPLES OF ELONGATOR SEWING

Examples of Elongator Sewing

See Fig. 33

Use pattern cam No. 1 to obtain results as shown in Fig. 33. Set pattern elongator (H) Fig. 20 at desired pattern length and sew from 1 to 2, from 2 to 3, from 3 to 4, etc.

To make the side patterns sew from center to the outside, from 2 to 7, from 3 to 8 and from 4 to 9.

See Fig. 34

When different pattern lengths are desired, sew all of one length first as from 1 to 2, from 3 to 4 and from 5 to 6. Then from 1 to 7, from 2 to 3, and from 4 to 5.

See Fig. 35

To obtain this pattern sew from center to the outside, 1 to 2, 1 to 3, 1 to 4 and 1 to 5.

See Fig. 36

Use pattern cam No. 2. Sew from 1 to 2, from 3 to 4 and from 5 to 6. Keep repeating until desired coverage is obtained.

See Fig. 37

Use pattern cam No. 6 for the stem portion and No. 1 for the leaves.

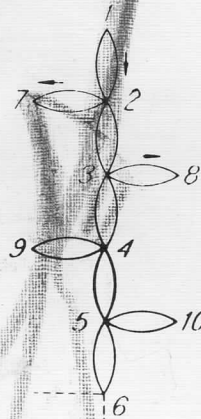


Fig. 33

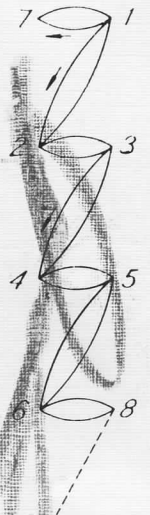


Fig. 34

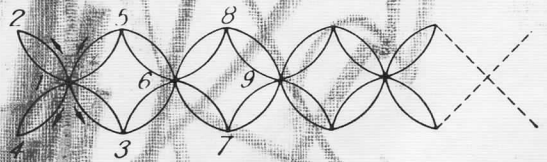


Fig. 35

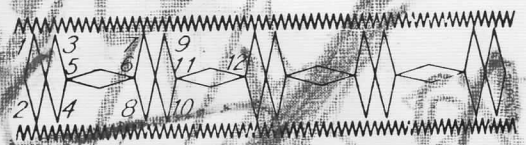


Fig. 36



Fig. 37